
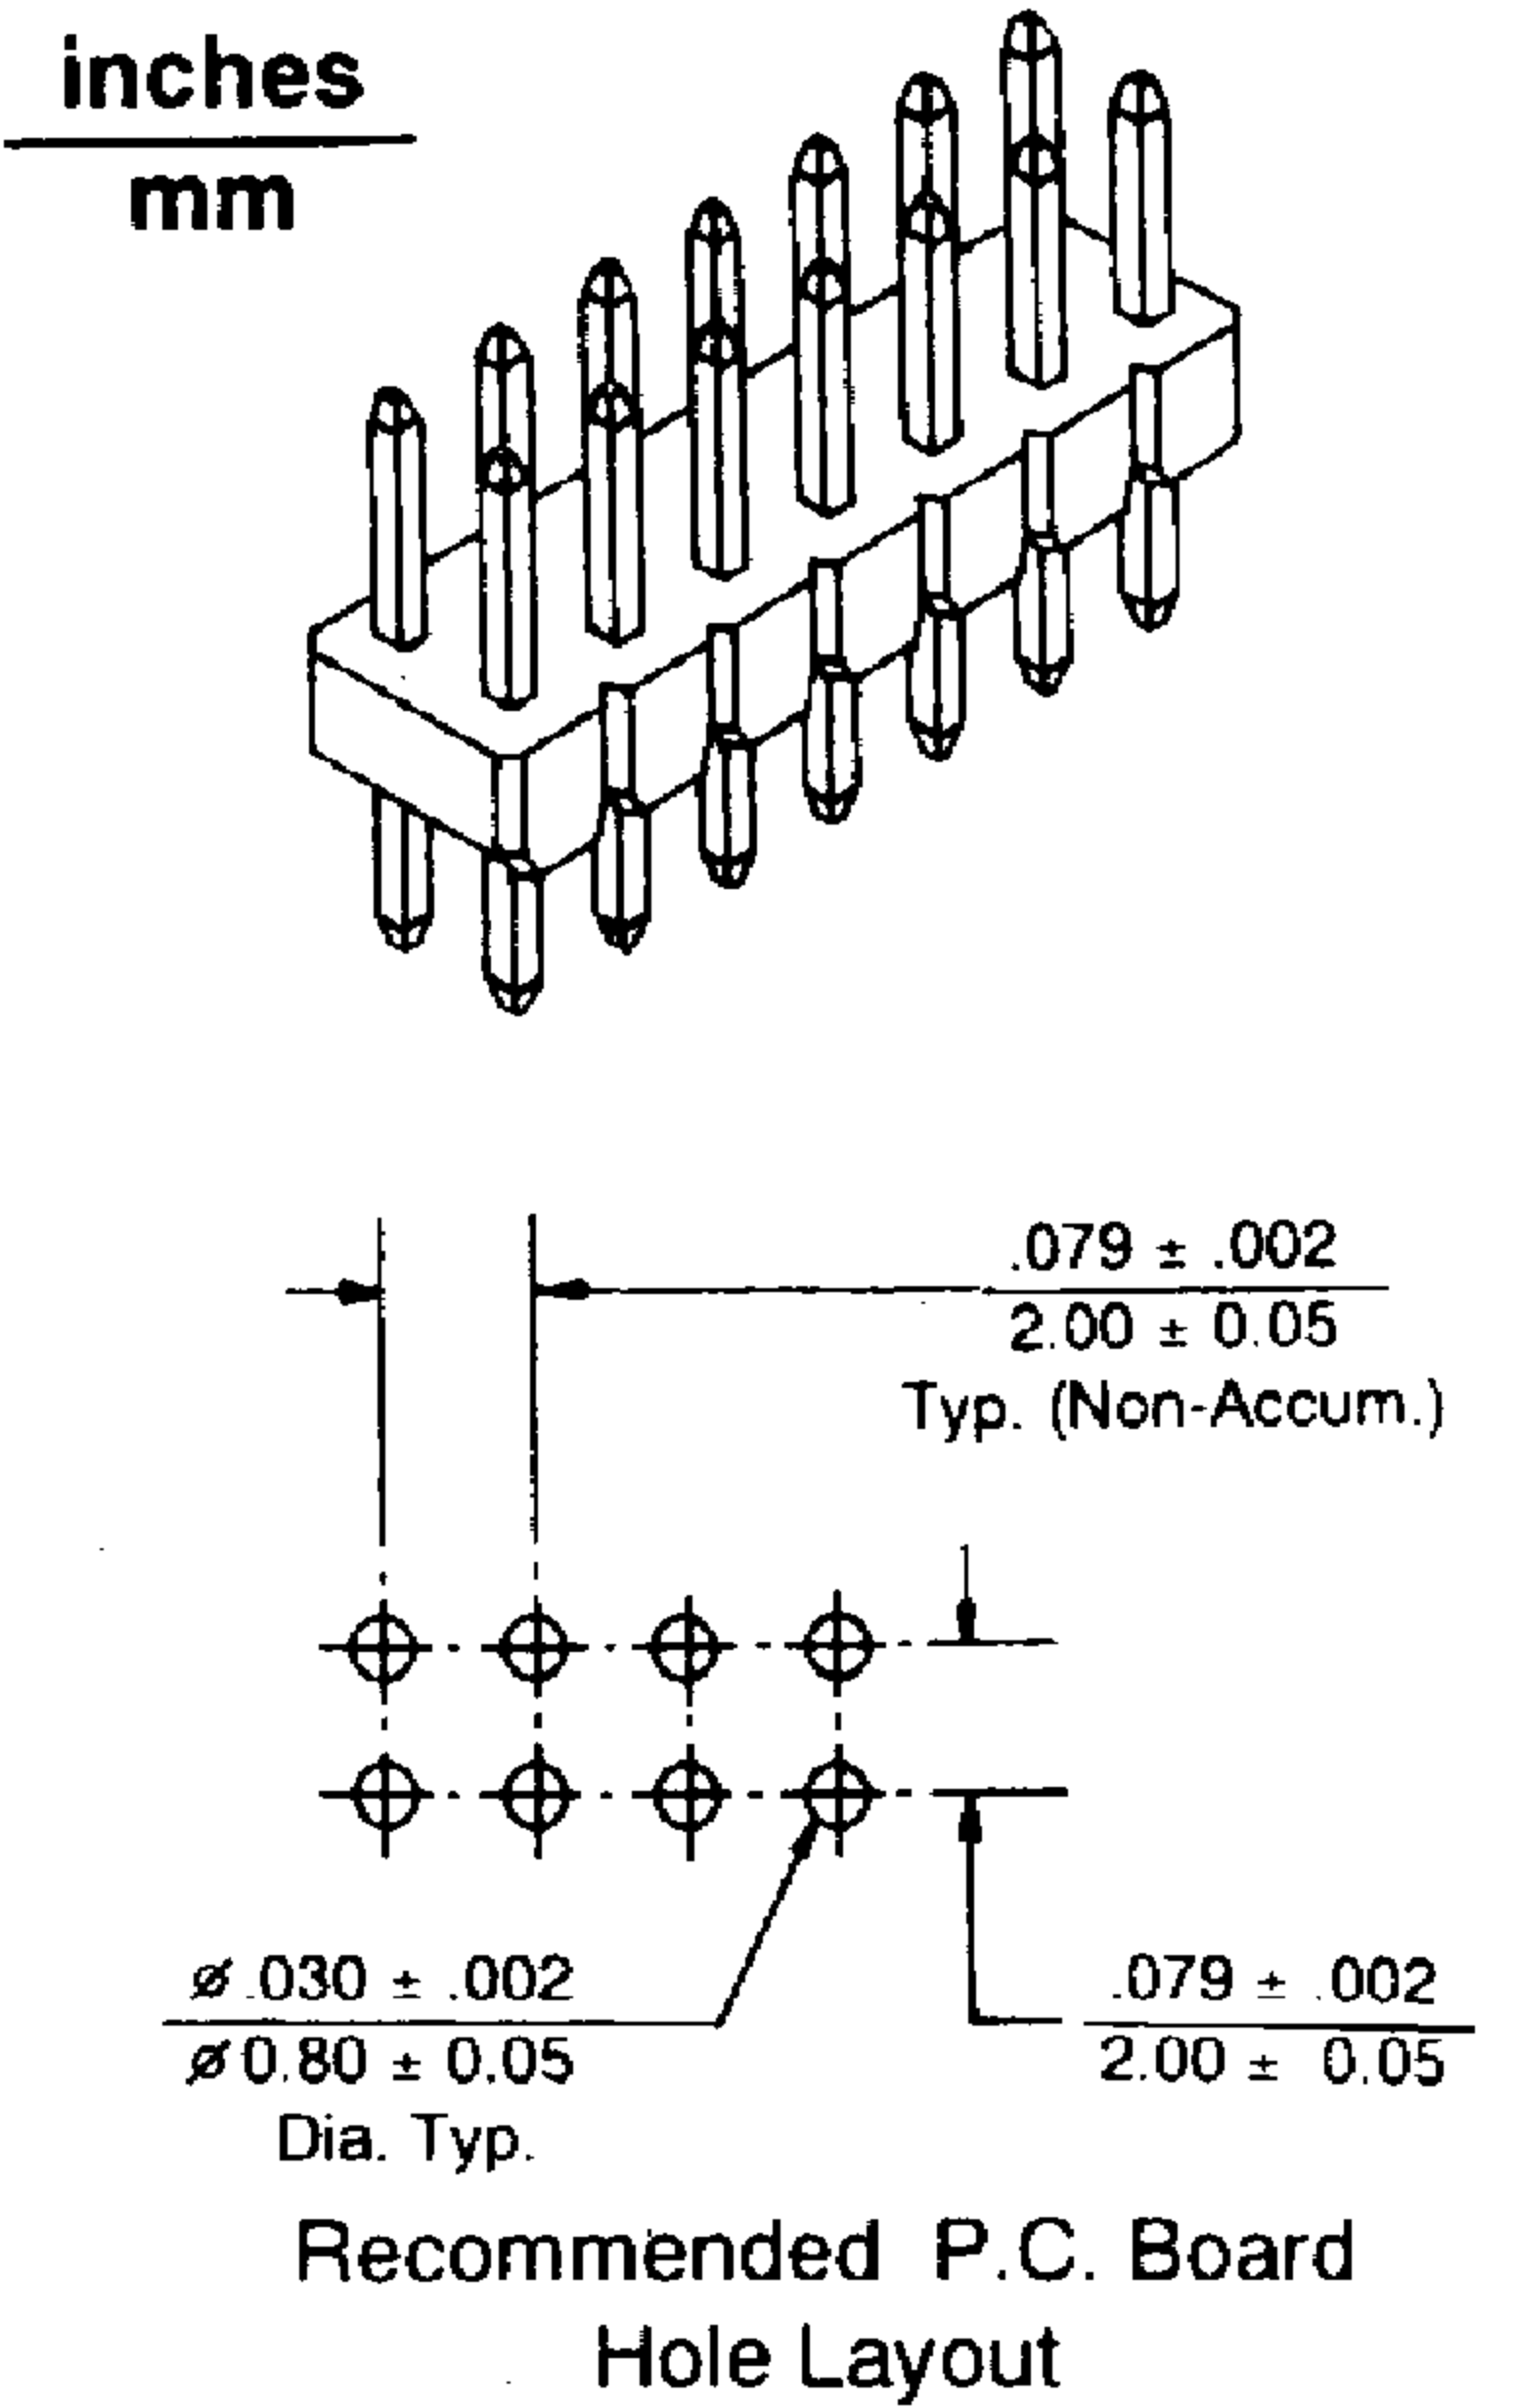


.079" (2,0mm) Center Headers

20013WMS-N Series Dual Row Straight Header

- Glass fiber polyester UL 94V-0
- .020" (0.5mm) straight square wire pins
- Various pin lengths available
- 4-80 circuits available
- Mates with 20008H, 20013WF series housings
- Applicable PC board thickness: .063" (1.6mm)

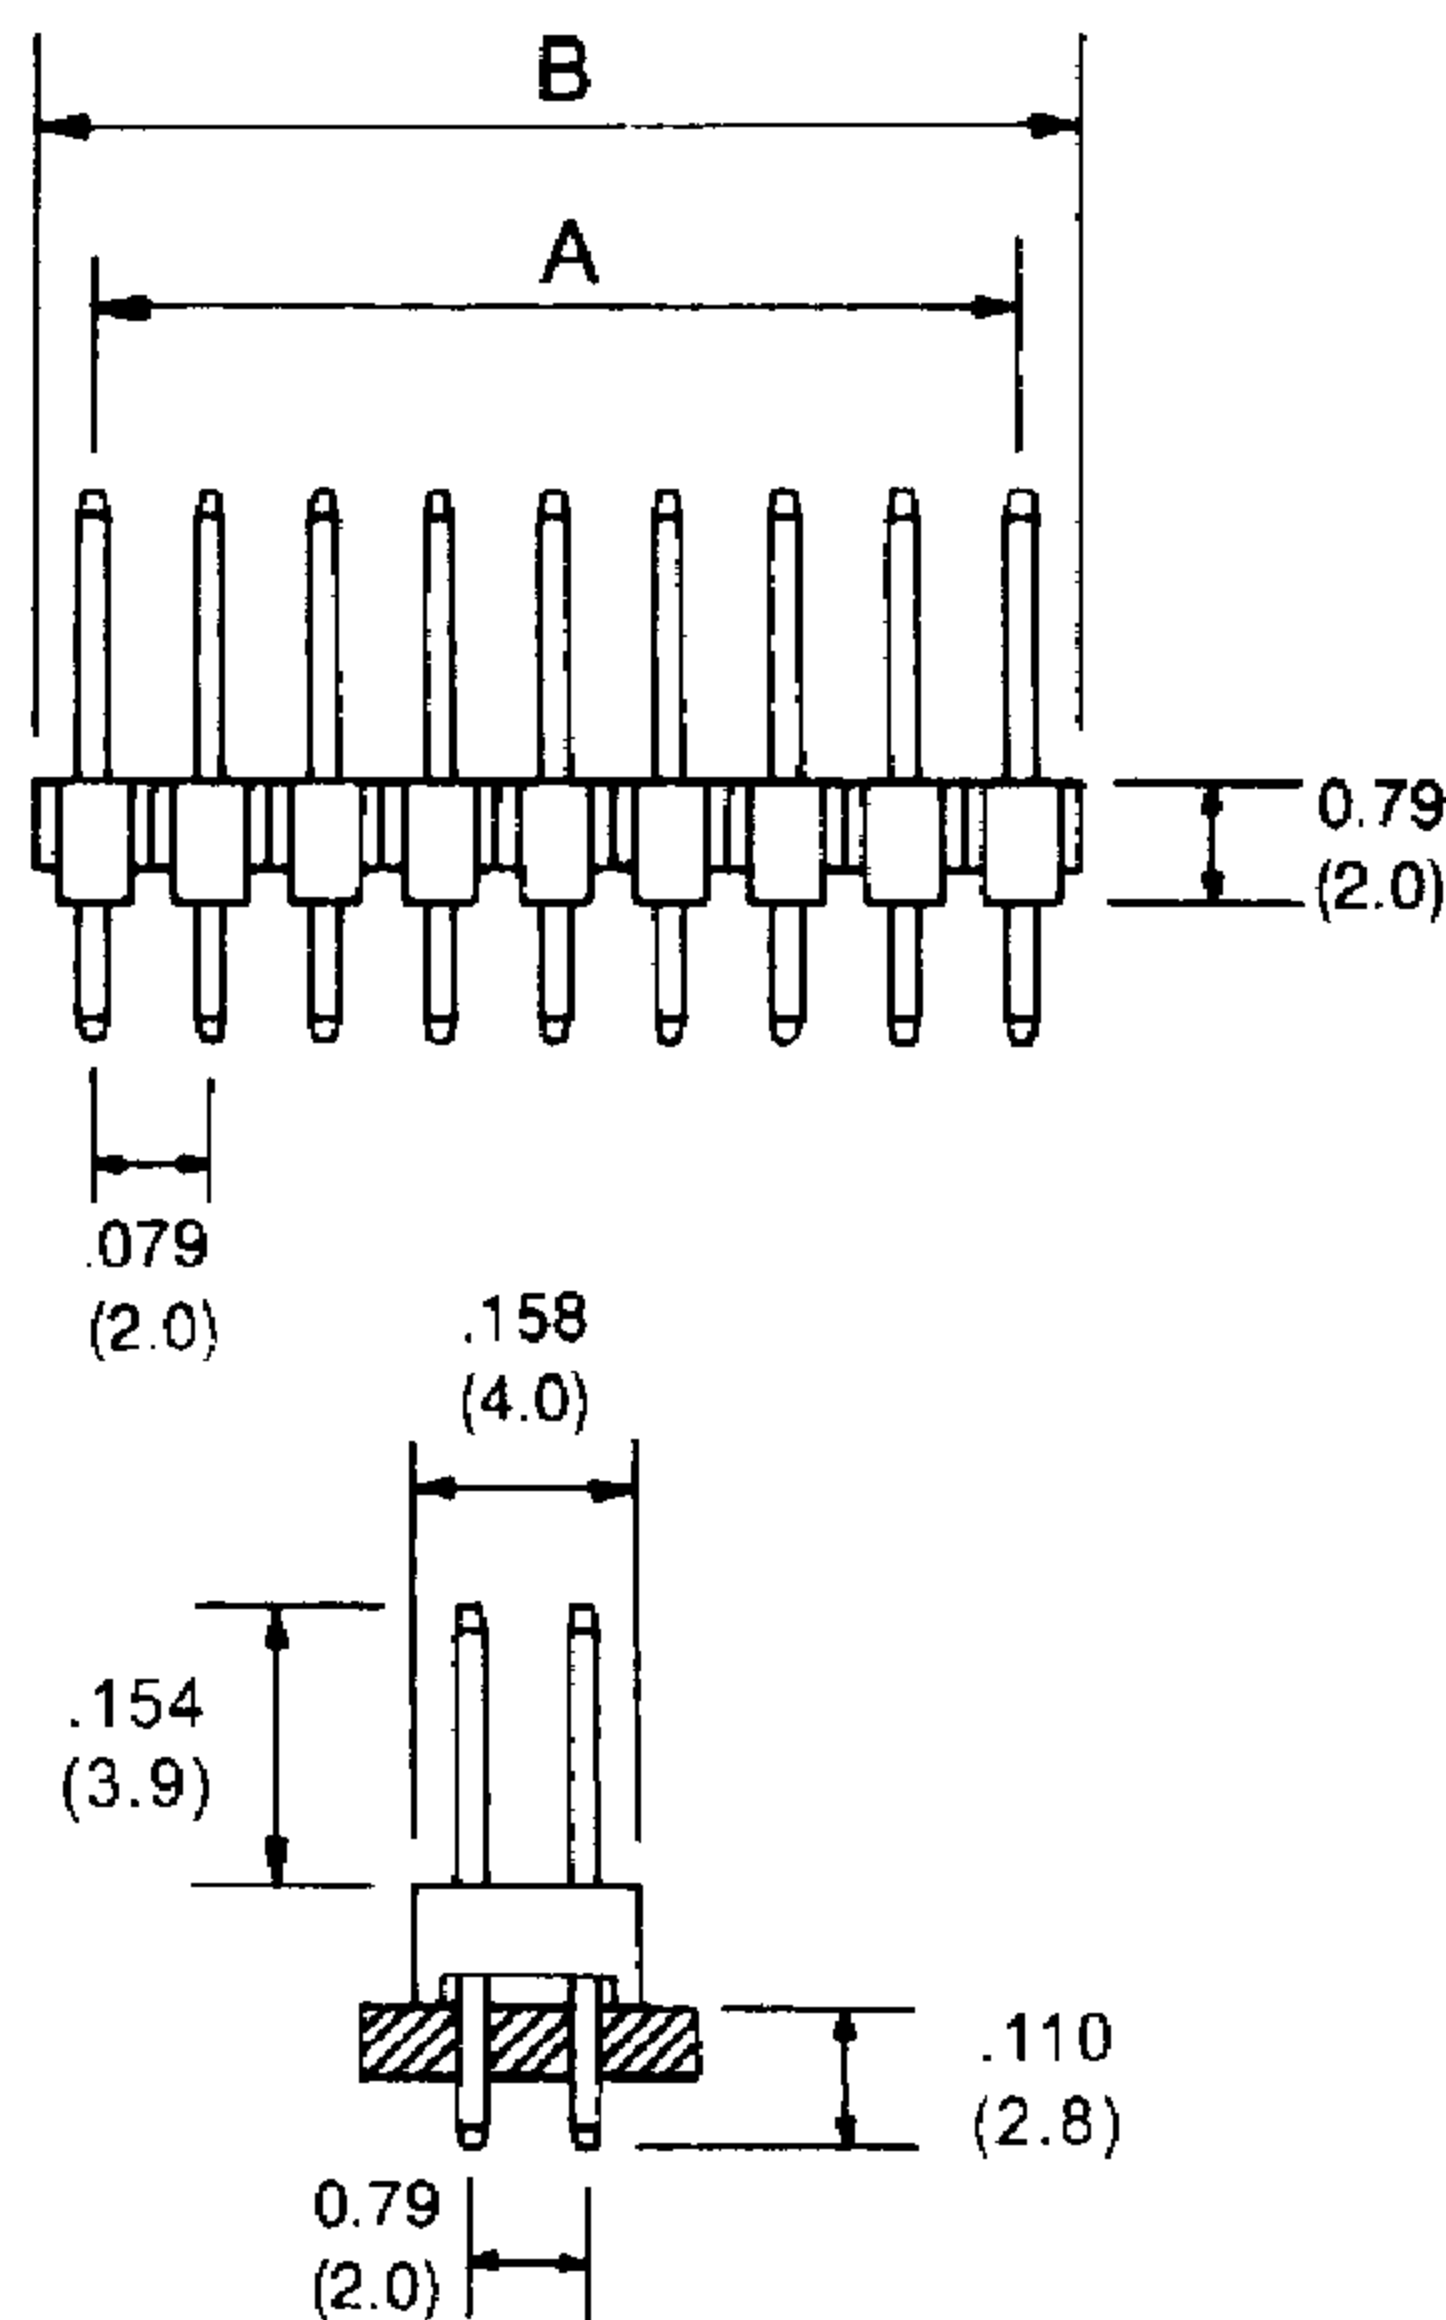

Dimensional Information - in. (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
4	.079 (2.0)	.167 (4.0)	30	1.102 (28.0)	1.181 (30.0)	56	2.126 (54.0)	2.205 (56.0)
6	.167 (4.0)	.236 (6.0)	32	1.181 (30.0)	1.260 (32.0)	58	2.205 (56.0)	2.284 (58.0)
8	.236 (6.0)	.315 (8.0)	34	1.260 (32.0)	1.339 (34.0)	60	2.284 (58.0)	2.362 (60.0)
10	.315 (8.0)	.394 (10.0)	36	1.339 (34.0)	1.417 (36.0)	62	2.362 (60.0)	2.441 (62.0)
12	.394 (10.0)	.472 (12.0)	38	1.417 (36.0)	1.496 (38.0)	64	2.441 (62.0)	2.520 (64.0)
14	.472 (12.0)	.551 (14.0)	40	1.496 (38.0)	1.575 (40.0)	66	2.520 (64.0)	2.599 (66.0)
16	.551 (14.0)	.630 (16.0)	42	1.575 (40.0)	1.654 (42.0)	68	2.599 (66.0)	2.677 (68.0)
18	.630 (16.0)	.709 (18.0)	44	1.654 (42.0)	1.732 (44.0)	70	2.677 (68.0)	2.756 (70.0)
20	.709 (18.0)	.787 (20.0)	46	1.732 (44.0)	1.811 (46.0)	72	2.756 (70.0)	2.835 (72.0)
22	.787 (20.0)	.866 (22.0)	48	1.811 (46.0)	1.890 (48.0)	74	2.835 (72.0)	2.913 (74.0)
24	.866 (22.0)	.945 (24.0)	50	1.890 (48.0)	1.969 (50.0)	76	2.913 (74.0)	2.992 (76.0)
26	.945 (24.0)	1.024 (26.0)	52	1.969 (50.0)	2.047 (52.0)	78	2.992 (76.0)	3.071 (78.0)
28	1.024 (26.0)	1.102 (28.0)	54	2.047 (52.0)	2.126 (54.0)	80	3.071 (78.0)	3.150 (80.0)

20013 WMR1-N Series Dual Row Right Angle Header

- Glass fiber polyester UL 94V-0
- .020" (0.5mm) right angle square wire pins
- Various pin lengths available
- 4-80 circuits available
- Mates with 20008H, 20013WF series housings
- Applicable PC board thickness: .063" (1.6mm)

