

Disk Drive Power Connection System


25002T Series

Crimp Terminal

- Used in 25002HM-N series housing
- Applicable wires: AWG #26 ~ #20
- Insulation O.D.: .071" (1.8mm) max.



inches
mm

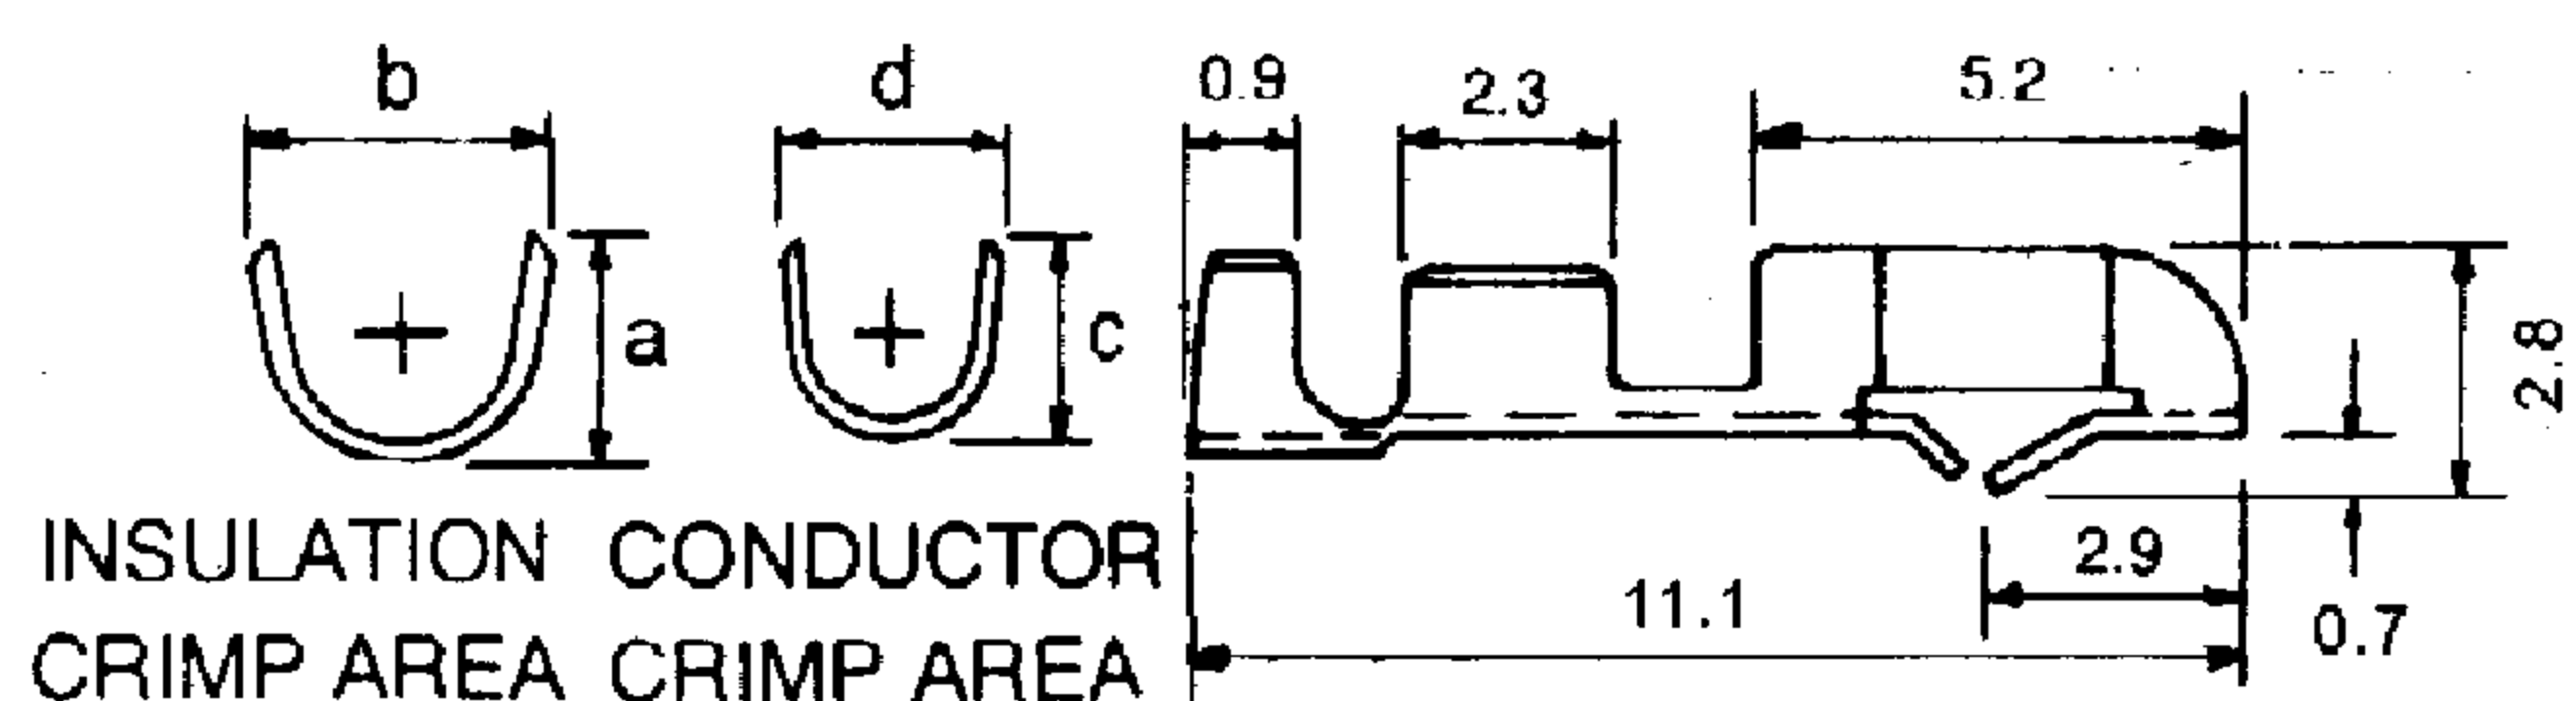

Dimensional Information:


Part No	Dimension (mm)				Wire		Thickness (mm)	Terminal		Q'ty/Reel
	a	b	c	d	Accommodation (# AWG)	Insulation (O.D. MAX)		Material	Finish	
25002T2	3.2	2.6	1.7	2.0	#24 ~ #20	φ 1.8mm	0.2	Brass	Tin-plated	8,000
25002TP2								Phosphor bronze		
25002T1	2.6	2.3	1.7	2.0	#26 ~ #22	φ 1.58mm		Brass		12,000
25002TP1								Phosphor bronze		

25002HM-N Series

Housing

- Material: 94V-2 nylon
- 2-12 circuits available
- Standard color: white
- Accepts 25002T series terminal
- Mates with 25002W series header

inches
mm

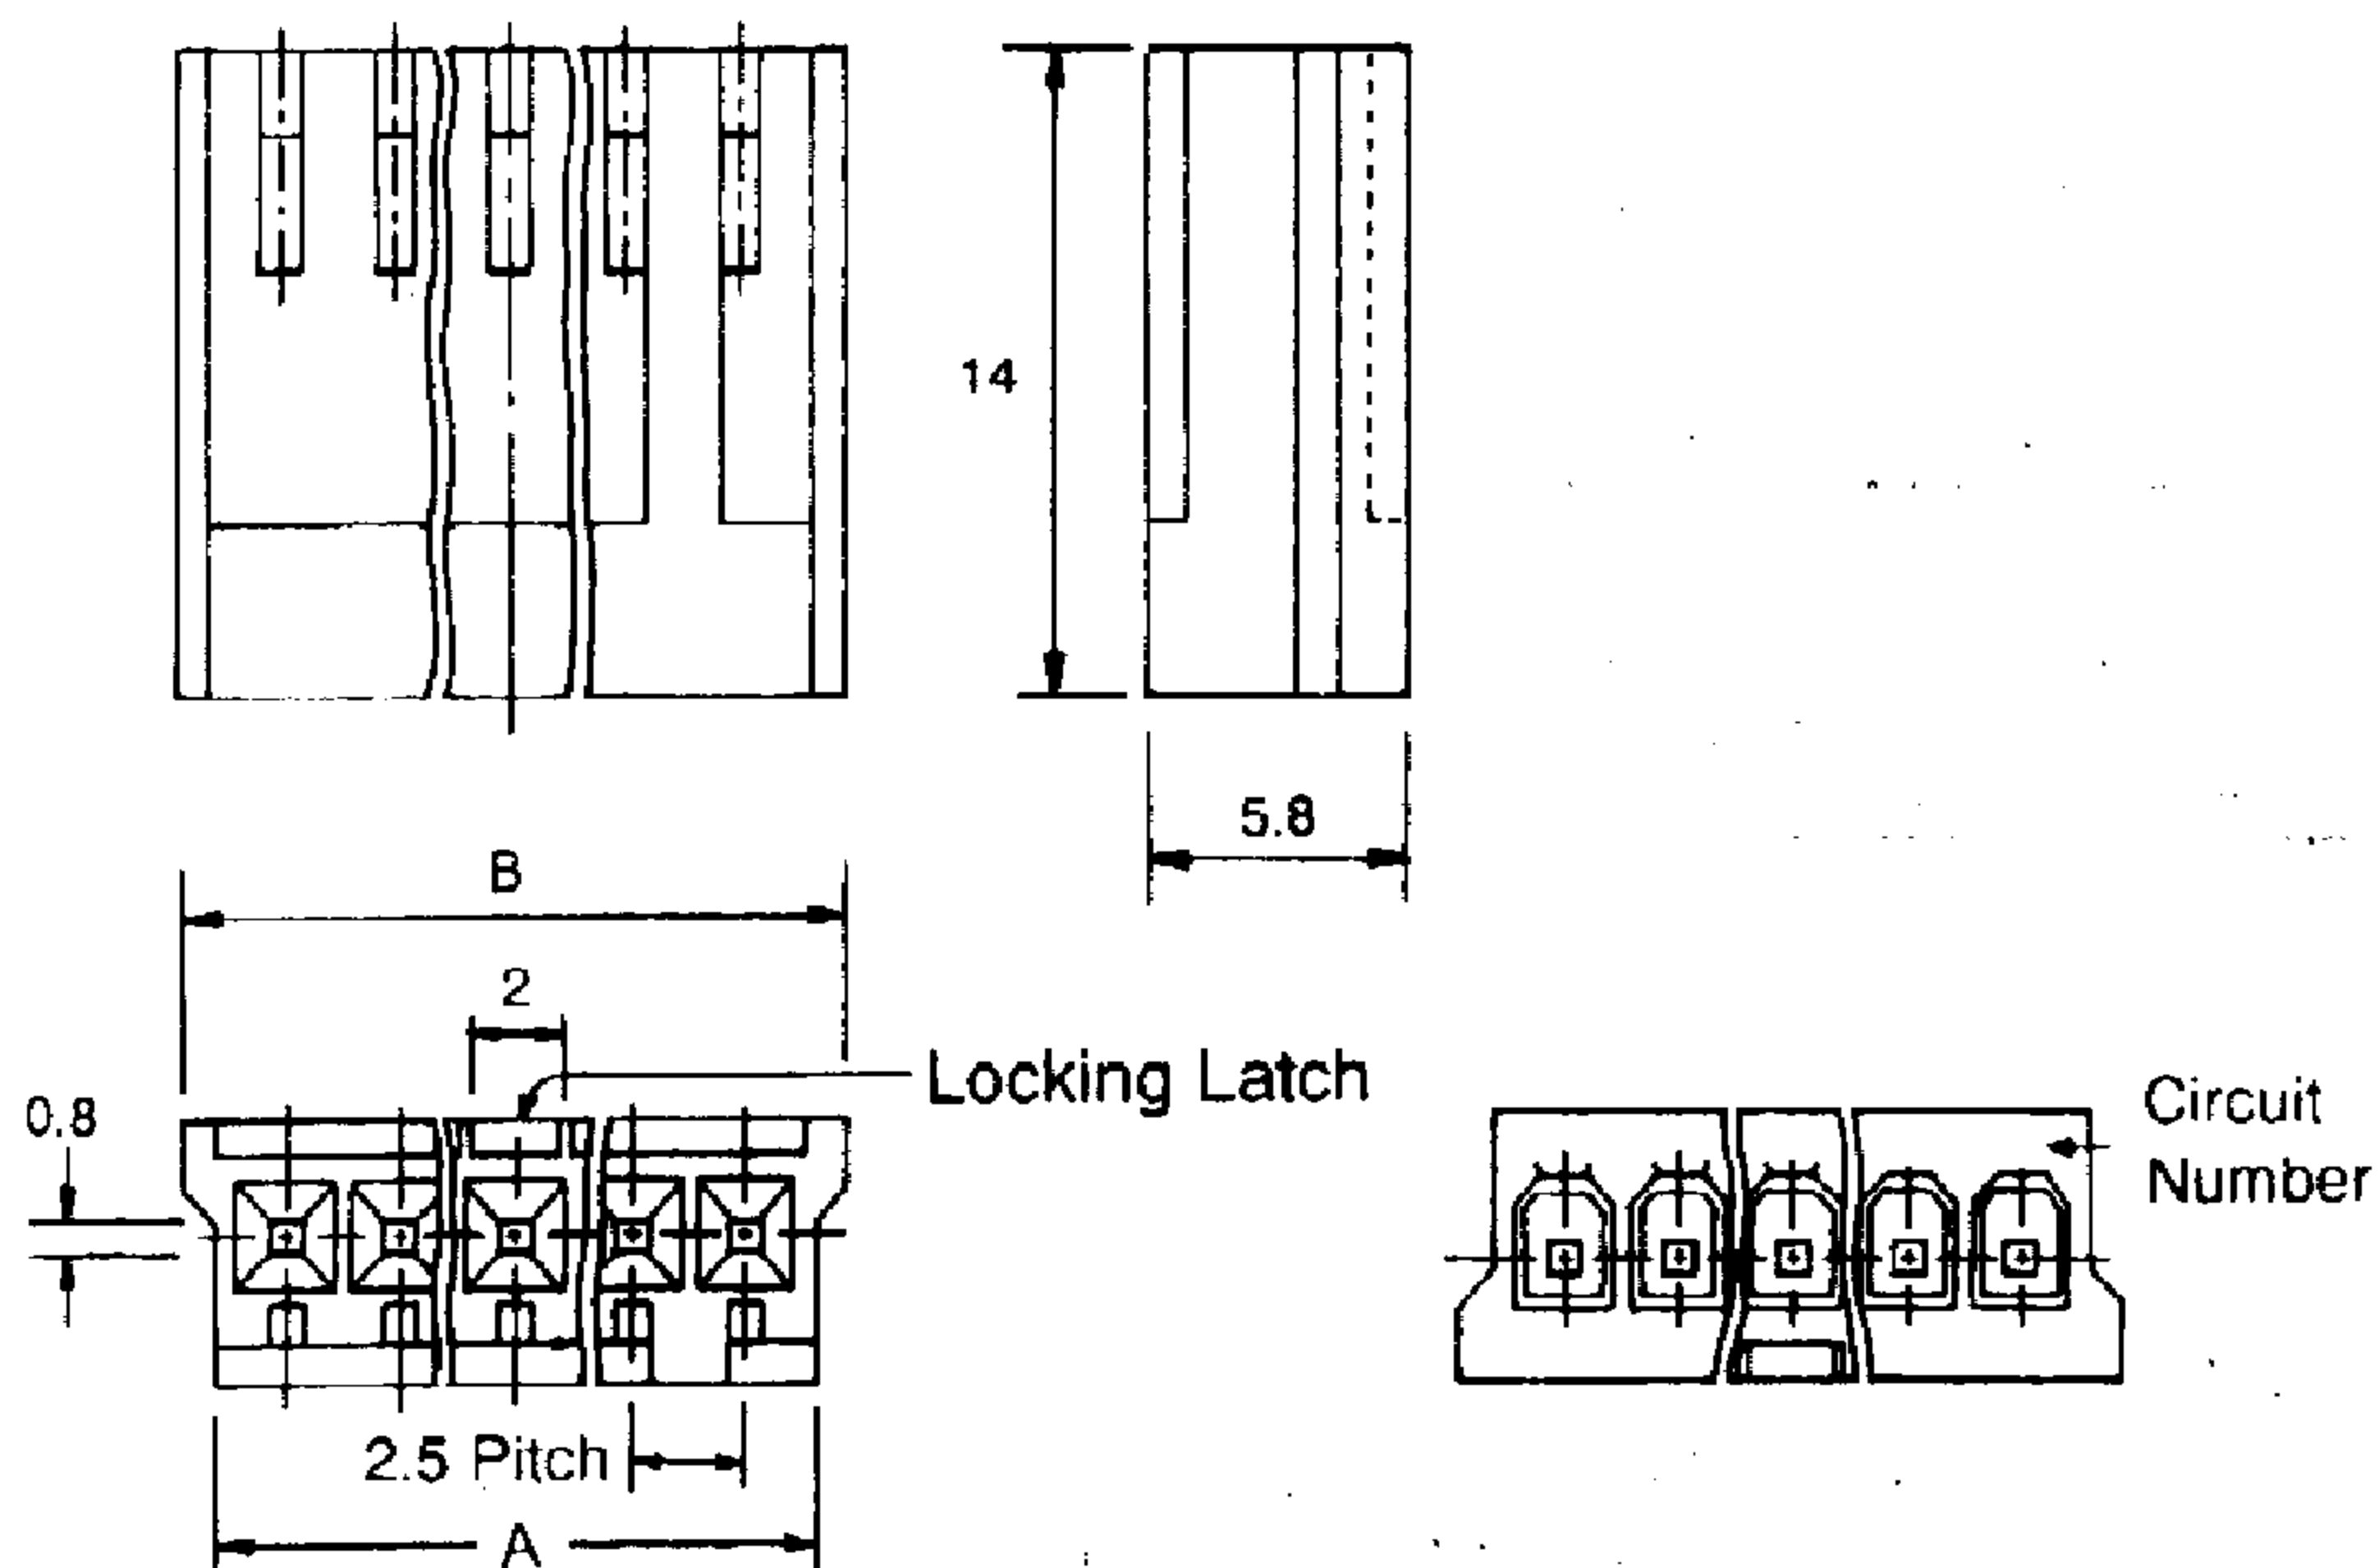

Dimensional Information - in. (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	.220 (5.6)	.291 (7.4)	8	.811 (20.6)	.882 (22.4)
3	.319 (8.1)	.400 (9.9)	9	.909 (23.1)	.980 (24.9)
4	.417 (10.6)	.488 (12.4)	10	1.008 (25.6)	1.079 (27.4)
5	.516 (13.1)	.587 (14.9)	11	1.106 (28.1)	1.177 (29.9)
6	.614 (15.6)	.685 (17.4)	12	1.205 (30.6)	1.276 (32.4)
7	.713 (18.1)	.783 (19.9)			