


.157"/.315"/.472" (4.0mm/8.0mm/12.0mm) Crimp Terminal Housing

Specifications:

- Current rating: 1AAC, DC
- Voltage rating: 600V AC, DC
- Dielectric withstanding voltage: 2P: 3000V AC/minute
3P ~ 5P: 1000V AC/minute
- Contact resistance: Initial value/10mΩ Max.
- After environmental testing/20mΩ Max.
- Ambient temperature range: -25°C ~ 85°C
(including temperature rise)


40001TF Series Crimp Terminal

- Material: Phosphor bronze
- Finished: Tin-plated
- Used in 40001HM-N housing
- Wire range: #22 ~ #28 AWG
- Thickness: 0.2mm

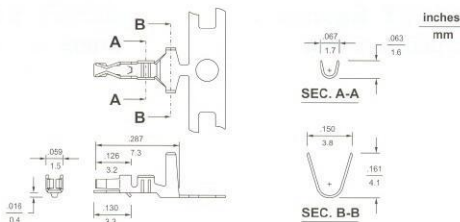

40001HM-N Series Crimp Terminal Housing

- 2 ~ 5 circuits available
- Material: UL 94V-0 nylon 66
- Accepts 40001TF terminal
- Mates with 40001VW-N header

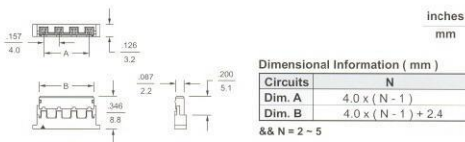

40001WR-SMT-N Shrouded Header

- 2 ~ 5 circuits available
- Contact material: Tin-plated brass
- Insulation material: UL 94V-0 nylon 9T
- Mates with 40001HM-N housing

