


603


High-Density Female Headers—Economy Version 1.27mm pitch Height:4.6mm

Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	stamped and formed,Phosphor Bronze
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	500 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	Pitch 1.27mm, □ 0.46mm male header

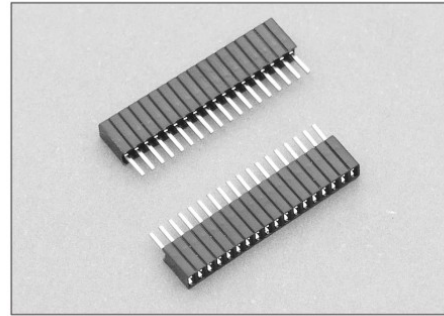

RoHS Compliant

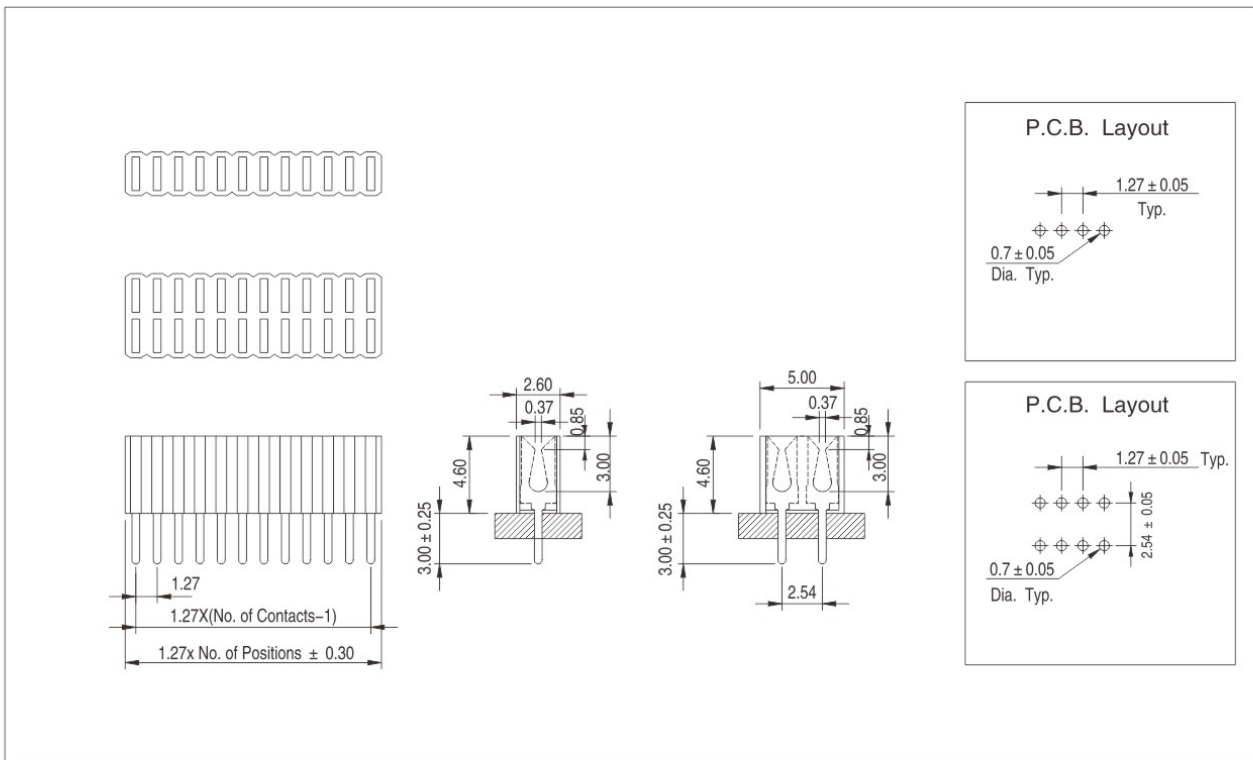

How to order



Number of contact	Code
1 - single max. 40 poles	02-40
2 - double max. 100 poles	04-100

Number of row	Code
1 - single	1
2 - double	2

Plating option contact	Code
Gold plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.